


# Chaise Lounge Assembly

Chaise Lounge comes unassembled in two (2) separate pieces—a back and a base

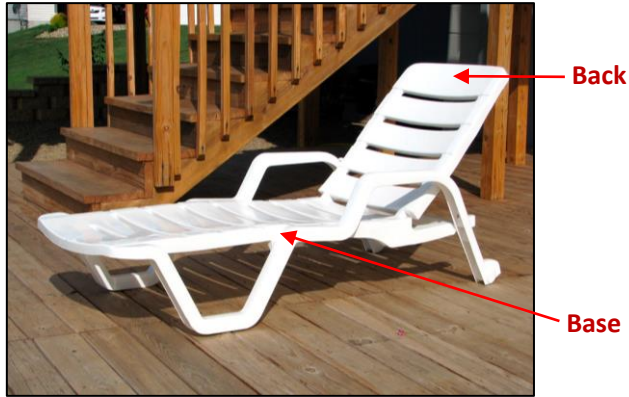


**Step One:** Line up the two claw hooks on the back so that they are resting on top of the two grooved rods on the base. Back is not fully assembled until it snaps into place.

**Step Two:** With the back vertical, rest claw hooks on top of the grooved rods. Use your body weight to push down until the hooks snap over the rods. **TIP: It might be easiest to push down on only one side at a time.**



**Claw-Shaped Hooks**  
(one on each side of the back)

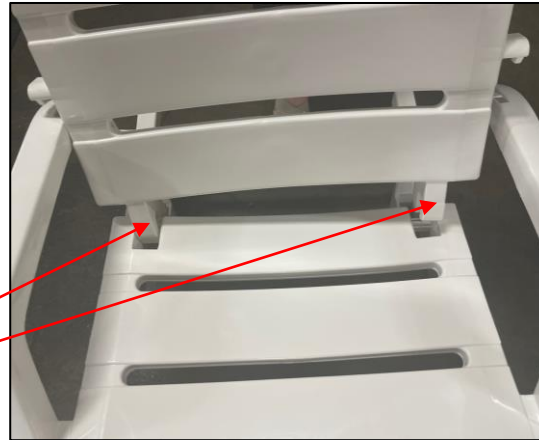

**Grooved Rods**  
(one on each side of the base unit)



Push hooks straight down onto rods until you hear a snap and back doesn't come off when gently pulled

# Chaise Lounge Usage

**Step Three:** Once snapped into place, gently lift (pull) and rotate the back to align with any of the four back angle adjustment slots.

**Step Four:** push down to set the pin into the back angle adjustment slot. Make sure the pin is fully recessed.



One of four back angle adjustment slots

Pin

